



ANLY COUNTER

AH5CK / AH5K PRESET COUNTER



CHARACTERISTIC :

- Proximity and photoelectric switch compatible
- Seven-segment-display for clear display and effective monitoring
- Protection against power surge and high frequency interference
- Input signal - active-low or active-high input contact (1+4)
- Available on Count Up or Count Down model
- Reset method - shut-off reset or shorting contact (1+3) instantaneous reset
- Memory switch allows users to enable or disable permanent memory function *
- Manual reset button on faceplate *
- UL, C-UL recognized and CE certified *

Note: *indicates applicable to AH5CK series only

TYPE SELECTION :


SPECIFICATION :

Operating voltage	AH5CK AC/DC(V): 12~48
	AH5K AC/DC(V): 100~240
Allowable operating voltage range	AH5K DC(V): 12, 24
	AC(V): 12, 24, 110, 220, 240
Rated frequency	85~110% of rated operating voltage
Contact rating	50 / 60 Hz
Count speed	250VAC 5A (resistive load)
Reset time	MAX 60 cps or 200 cps
Power consumption	MAX 0.1S
Life	AH5CK Approx. 2.5VA
	AH5K, AH5K-C Approx. 2VA
Ambient temperature	Mechanical: 5,000,000 times
Ambient humidity	Electrical: 100,000 times
Altitude	-10 ~ +50°C (without condensation & freezing)
Weight	MAX 85% RH (without condensation)
	MAX 2000m
	AH5CK Approx. 130g
	AH5K Approx. 170g
	AH5K-C Approx. 160g


Display	4Digits(0~9999)				3Digits(0~999)	2Digits(0~99)
Memory	○	○	----	----	----	----
Output contact	1C	2C	1C	----	1C	1C
Standard (under 60 cps)	AH5CK	AH5CK-11	AH5K-4D	AH5K-C	AH5K-3D	AH5K-2D
High speed (under 200 cps)	AH5CK-H	AH5CK-11H	AH5K-4DH	AH5K-CH	AH5K-3DH	AH5K-2DH
Count down	AH5CK-D	AH5CK-11D	AH5K-4DD	AH5K-CD	AH5K-3DD	AH5K-2DD
Auto reset	AH5CK-R	AH5CK-11R	AH5K-4DR	AH5K-CR	AH5K-3DR	AH5K-2DR

CONNECTION :


AH5CK




AH5K



AH5K-C




AH5CK-11




Note: AH5K, AH5K-C: When using Proximity(Type PNP) or photoelectric switch, connect (+) to pin (1), (-) to pin (3) and (OUT) to pin (4)
 AH5CK: When using Proximity(Type NPN) or photoelectric switch, connect (+) to external 12VDC, (-) to pin (1) and (OUT) to pin (4)
 AH5CK-11: When using Proximity(Type NPN) or photoelectric switch, connect (+) to external 12VDC, (-) to pin (6) and (OUT) to pin (5)

TIMING CHART :


AH5CK, AH5K

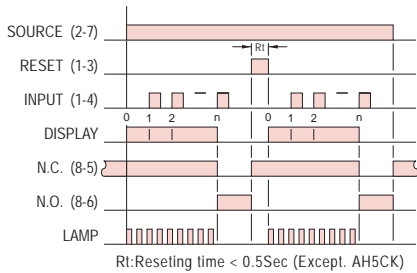

AH5K-C

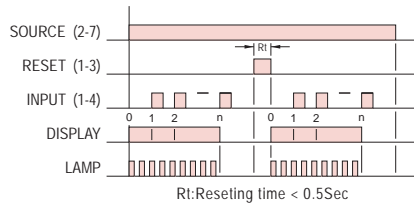


AH5CK-11

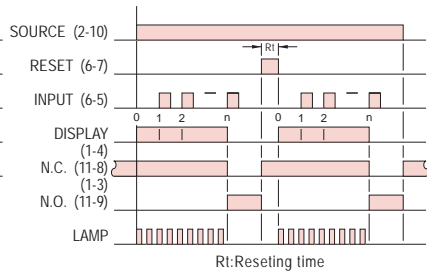


DIMENSIONS : (mm)

N type(Surface Mounting): Using P2CF-08 , PF085A Socket or PF113A Socket(for AH5CK-11 use only)

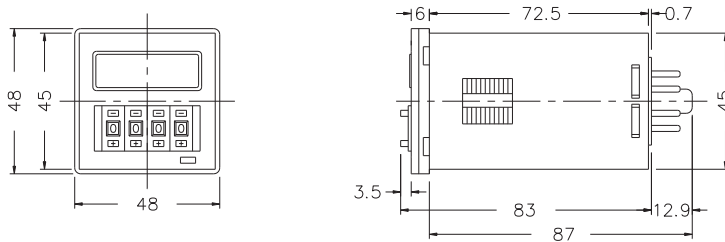

Y type(Flush Mounting): Using Y50 Frame & US-08 Socket , P3G-08 Socket or P3G-11 Socket(for AH5CK-11 use only)

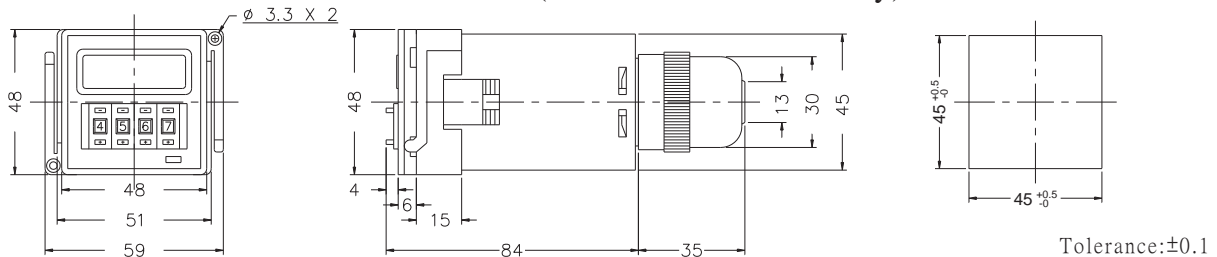

ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan
 TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

MALAYSIA BRANCH : JUSTY ELECTRONICS (M) SDN, BHD.

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia
 TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

HONG KONG BRANCH : ANLY ELECTRONICS (HK) LTD.

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong
 TEL: +852-2397-2505 FAX: +852-2397-6080

SHANGHAI BRANCH : ANLY TECHNOLOGY (WUXI) CO., LTD.

Room 13G, No.831, Xinzha Rd., Jingan District, Shanghai, China 200041
 TEL: +86-21-6218-3300 FAX: +86-21-6217-5911